


Features:

- Complete ready-to-run application for Windows
- Windows 11 compatible
- ASTERIX CAT-21 ADS-B data input
- NMEA-0183 navigation data to support moving platforms
- Multiple map support (Online & Offline):
 - Tiled maps
 - Terrain contour map
 - World map
 - User map graphics
- History trails and target vectors ("leader lines")
- Configurable target label display
- Flexible configuration options
- Full zoom and off-centre control
- Display filters
- Overlay graphics:
 - Range rings
 - Rulers
 - Range scale indicator
- Multiple track monitor windows
- Easy configuration wizard

```
Track: 1272
Classification: ---
Position: 51° 26' 49.91" N
          00° 08' 27.32" W
Speed: 194 Kts
Heading: 309°
Altitude: 6625 ft
Secondary: 0000
```

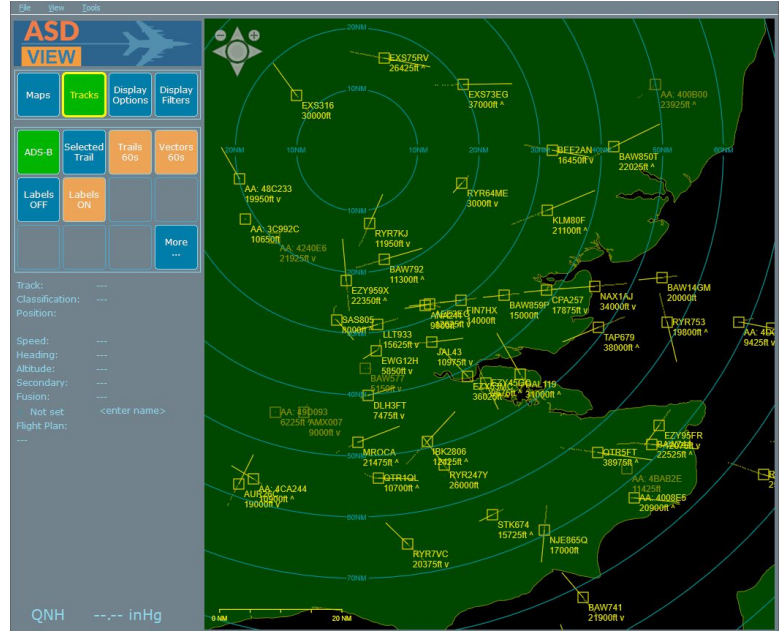

ASD-View is Cambridge Pixel's PC-based display application for ADS-B receivers. It is a complete ready-to-run Windows application for the display of target positions and associated information.

ASD-View is part of Cambridge Pixel's air surveillance display solutions which include the ASD-100 application for the display of primary and secondary radar data and associated information such as plots, tracks and safety alerts.

ADS-B Out capability is mandatory on aircraft equipment in most regions of the world. Additionally, ADS-B is increasingly used by helicopters, light aircraft, gliders, drones, airport vehicles and maritime vessels such as FSOs and offshore maritime platforms with helicopter landing areas.

ASD-View runs on any modern Windows PC, accepting input data from the network in open ASTERIX formats. ASD-View can interface to a number of different data inputs, including:


- ASTERIX CAT-21 (Automatic dependent surveillance)
- NMEA-0183 navigation data such as gyro heading and GPS positioning

The graphical user interface has been designed with modern touchscreen displays in mind. To this end, the frequently-used controls are readily accessible and operated by large buttons. Common view controls, such as pinch-to-zoom and slide-to-pan are supported.

Going Further with ASD-100

Where ASD-View provides a visualisation capability for ADS-B tracks, Cambridge Pixel's ASD-100 product expands the capabilities to include primary and IFF radar and derived track data. The ASD-100 display can show any combination of ADS-B data, primary radar video, IFF radar video, primary tracks and IFF tracks fused together and presented on a geo-located map with a comprehensive set of tools for air defence applications.

DATASHEET

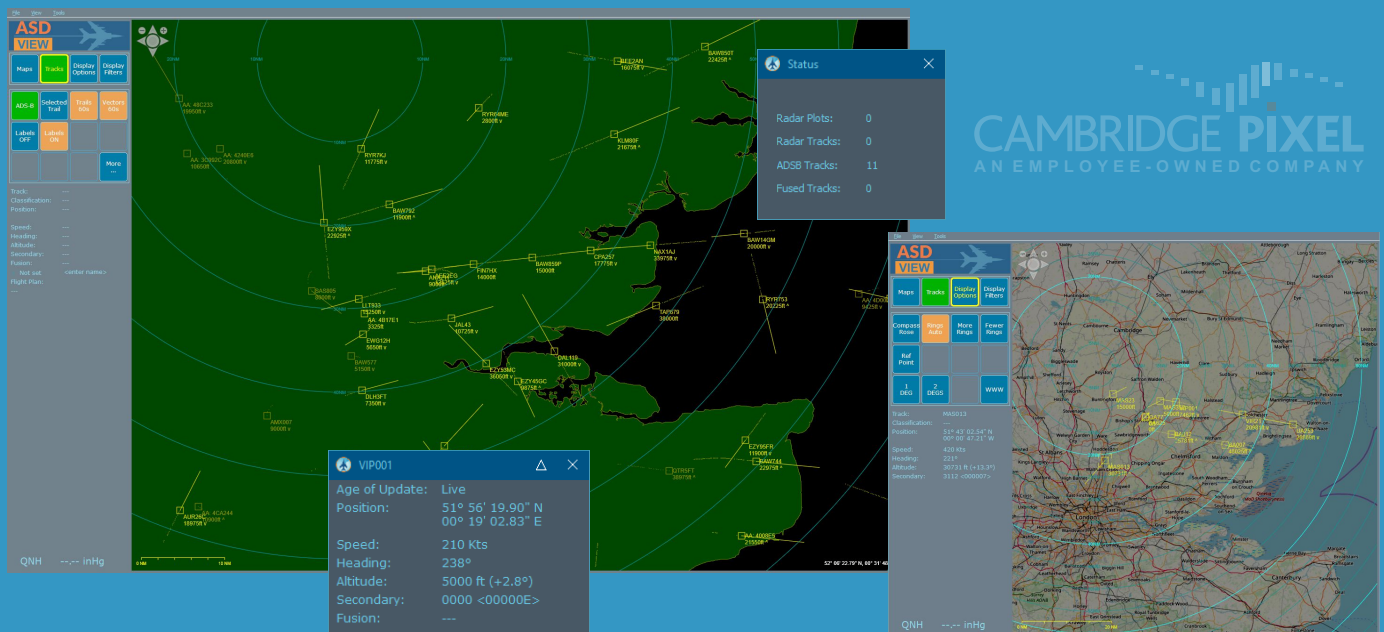

Operating Systems

Windows 11

Number of Input Channels

- 1 channel of ADS-B data
- 1 channel of NMEA-0183 Navigation Data

Supported Inputs

ADS-B: ASTERIX CAT-21 or 112-bit extended squitter (with SPx header)

PPI Display

- Underlay maps:**
- Tiled maps (Open Street Map)
 - Terrain Contour map
 - World Vector Shoreline map

- Overlay graphics:**
- Track displays
 - Range rings
 - Compass rose
 - Target symbols
 - Vectors (leader lines)
 - Trail history
 - Track labels
 - Multiple rulers (x8)
 - Cursor position
 - Reference Point
 - Popup Track Monitor windows
 - User map graphics

- Control:**
- Display filtering by height and speed / Area filtering
 - Track suppression ("GROUND" and "TEST" Track types)
 - Snapshot of display

ATC Information

QNH value display to assist ATC operators

Control and Configuration

Local GUI:


- User interface for local control and configuration
- Setup Wizard

Configuration File:

- Human-readable/editable text file

Operator Features

- Full zoom and off-centre
- Target display filters
- Configurable measurement units

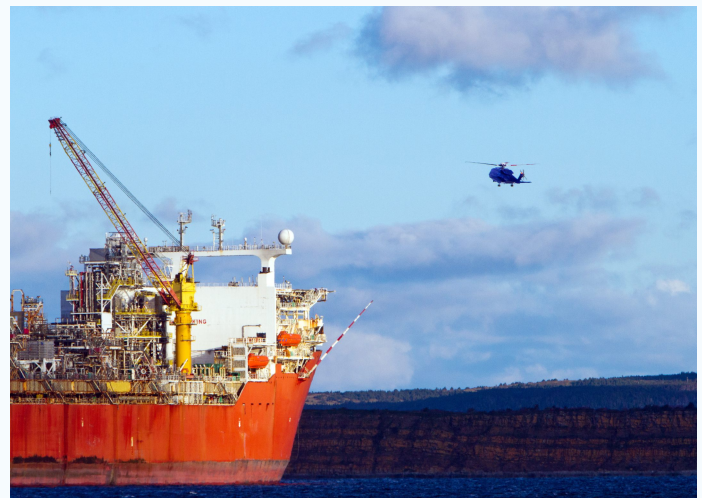

For more information, please contact:



Cambridge Pixel Ltd
New Cambridge House
Litlington, Royston
Herts SG8 0SS

+44 (0) 1763 852749
enquiries@cambridgepixel.com
www.cambridgepixel.com